




Eight Ricoh G6 Print Head

- Ricoh G6 printhead high-speed industrial print head, to better meet the demand of industrialization production.
- Magnetic suspension linear motor for higher printing accuracy.
- Negative pressure ink control system and ink degassing system greatly enhance the stability and uency of the ink jet.
- Belt au tomatic cleaning system to ensure continuous production and improve the production efficiency.
- The active take-up/unwinding structure ensures the stable stretchability of the fabric, so that the final appearance of the pattern is not deformed.




Machine model	TRUJET B8	回級回	
Printer head	Ricoh Gen-6 Printhead		100 A
Print height	2-30mm range is adjustabe		
Max. Print width	1900mm/2700mm/3200mm SCAN FOR PACKING DETAILS		
Max. Fabric width	1900mm/2700mm/3250mm		
Production mode	150m²/h (2pass)		
Image type	JPEG / TIFF / BMP file format, RGB / CMYK color mode		
Ink color	Ten colors optional : C, M, Y, K, Lc, Lm, Grey, Red, Orange, Blue		
Types of ink	Reactive / Disperse / Pigment / Acid / Cationic ink		
RIP Software	Neostampa / Wasatch / Texprint		
Transfer system	Continuous conveyor belt,automatic unwinding and rewinding		
Head cleaning	Auto head cleaning auto scraping device		
Power	Power ≤ 18 kW		
Power supply	380-420 VAC 3-phase, 4-wire plus ground		
Compressed air	0.3 m³/min. 6 bar Air pressure		
Working environment	Temperature 18-28 °C, humidity 50%-70%		
Width	1900mm	2700mm	3200mm
Overall dimensions	3855mmx2485mmx1520mm (L) (W) (H)	4555mmx2485mmx1520mm (L) (W) (H)	5600mmx2485mmx1520mm (L) (W) (H)
Weight	2500kg	2900kg	4000kg

B24 310m²/h (2pass) in 12 Colors

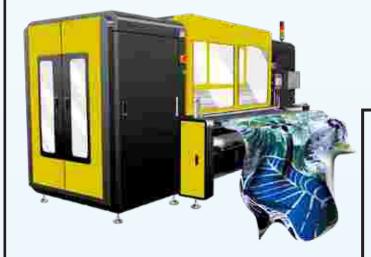

B SERIES


620m²/h (2pass) in 8 Colors

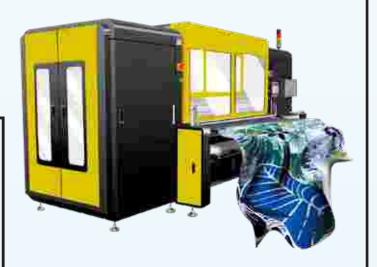

150m²/h (2pass)



B 16 310m²/h (2pass) in 8 Colors

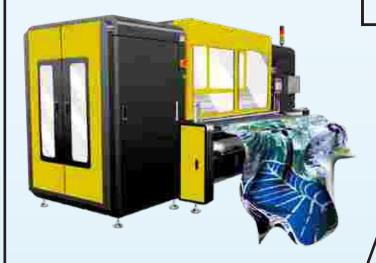



"PM TEX" Sp. z o.o. ul. Wojskowa 5/90, 60-792 Poznań, Polska. NIP 7792533536, KRS 0000939461 Tel: +48 571 480 510

620m²/h (2pass) in 12 Colors

